

双龙集团有限公司

上海 | 总部
地址: 上海市嘉定区南翔工业开发区德力西路299号
电话: 0086-21-69178818 / 69178808 / 69178817

北京 | 办事处
地址: 北京市朝阳区东四环华腾国际3号楼9B
电话: 010-87952663

广州 | 办事处
地址: 广州市广州大道南金穗雅园B1栋402室
电话: 020-89000670

SHUANGLONG GROUP CO., LTD.

Shanghai (Headquarters)
Address: No. 299, Delixi Rd, Jiading District, Shanghai
Tel: 0086-21-69178818 / 69178808 / 69178817

Beijing (Office)
Address: Beijing chaoyang district east fourth ring
hua teng international 3 floor 9 b
Tel: 010-87952663

Guangzhou (Office)
Address: Guangzhou guangzhou avenue south
Jin Sui graceland in B1 building, room 402
Tel: 020-89000670

Further products-更多产品, 详见官网www.shuanglong.com



* 因发展需要, 本公司保留设备规格、外形、配置变更的权利(资料如有不符, 以实物为准)。
* 本资料中图片和数据归我公司所有, 未经许可, 任何公司和个人不得使用, 否则, 追究其法律责任。



双龙集团官方微信



双龙集团官方网站

DSH系列 锥形混合机
Conical Screw Mixer Series




卓越品质
EXCELLENT QUALITY

锥形混合机的搅拌部件为一条长螺旋或两条不对称螺旋; 它们在绕自己的轴线转动(自转)的同时, 还借助悬臂的转动环绕锥形容器的中心轴沿锥形容器的内壁做行星运动(公转); 该设备通过螺旋的公、自转使物料反复提升, 在锥体内产生剪切、对流、扩散等复合运动, 从而达到混合均匀的目的。本机的优点是适用范围广、容积大、出料无残留、节能。锥形混合机适用于粉料与粉料、粉料与少量液体的混合, 还可以根据用户的要求制作加热、冷却、正压、真空等各种特殊形式。

The conical screw mixer consists of one long screw and one short screw. The long screw lift the material up and fall down with gravity. At the same time, the screw arms run slowly by means of revolution. This type of mixer is widely used for powder mixing and powder mixing with little liquid, without residues and low energy consumption. It could be tailor designed for heating, cooling, positive pressure and vacuum function.

可选项 | Options

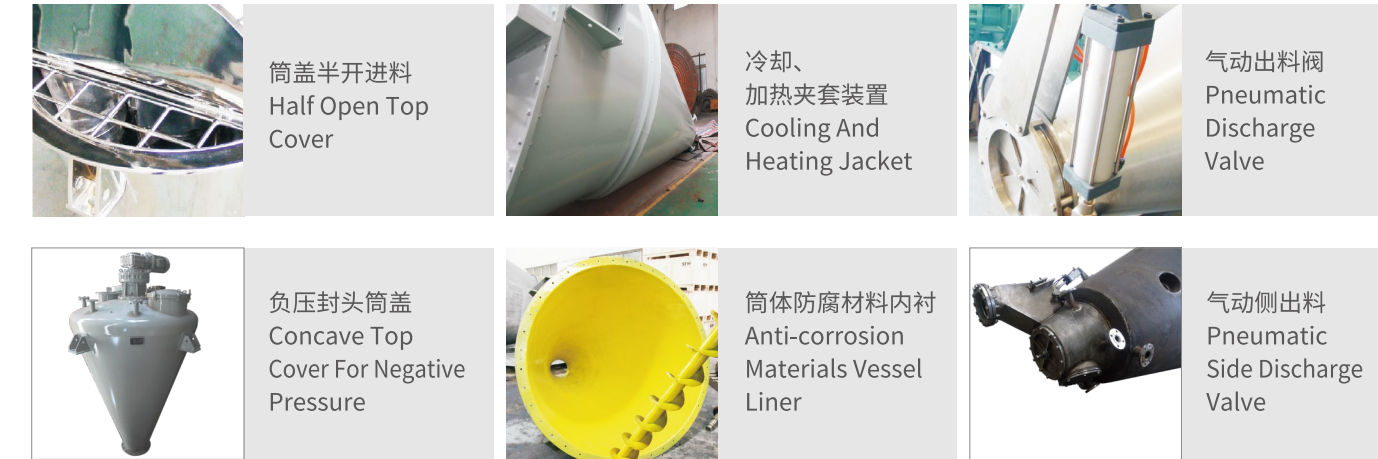

公转减速机、电机
Gearbox for Screw Arm

投料口
Feeding Inlet

螺旋
Screw

自转减速机、电机
Gearbox for Screw

人孔、检修孔
Maintenance Port

混合筒体
Vessel

错位阀
Dislocation Valve


高新技术企业 | 高端混合机领导者
NEW HIGH-TECH ENTERPRISE
LEADING MANUFACTURER OF POWDER MIXING EQUIPMENT

精密制造

PRECISED FABRICATION



搅拌结构 | Stir Structure

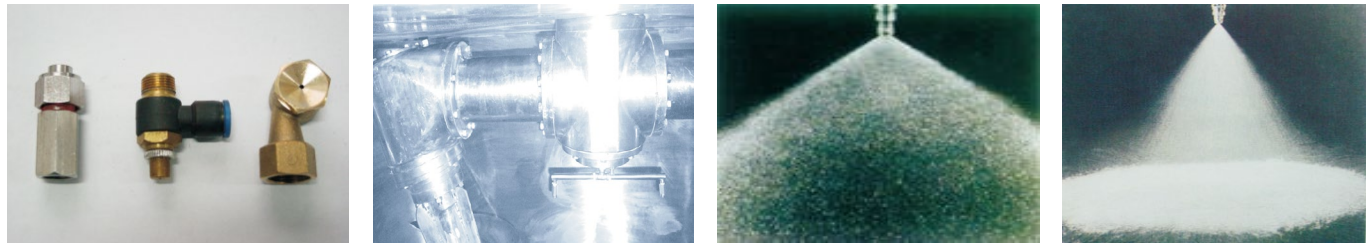


设备可选配雾化喷头或喷淋头,使雾化的液体成扇形、空圆锥形均匀的喷向物料,以达到均匀充分混合,满足不同工艺的需求。

Atomizing nozzles or spraying nozzles are available on request. creating fan shape or hollow cone, Liquid flow into mixtures to reach intensive mixing.




应用范围 | Applications

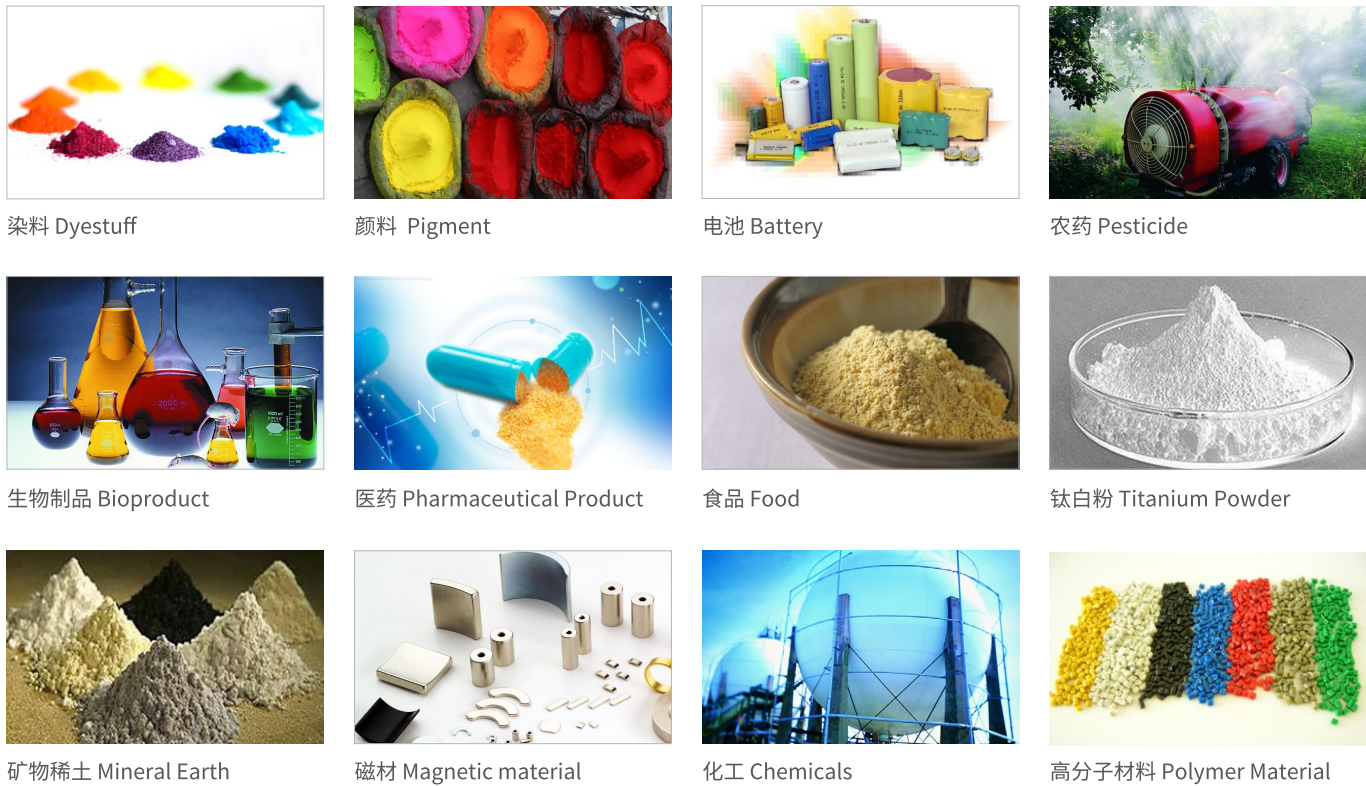


创新技术

INNOVATED TECHNOLOGY

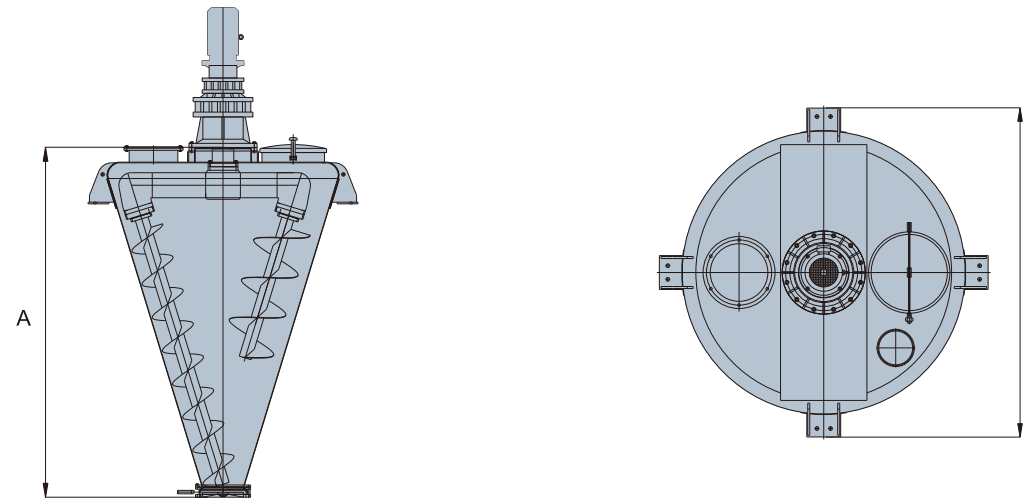

Model 型号	A	B	Motor Power 电机功率 (KW)	Working Volume 可用容量 (dm ³)	Dry Weight 空载重量 (kg)
DSH-0.06	1451	630	1.5	0.03	150
DSH-0.1	1569	715	1.5	0.06	250
DSH-0.3	1300	1014	2.2	0.18	550
DSH-0.5	1600	1186	3	0.3	600
DSH-1	2000	1608	4	0.6	1200
DSH-1.5	2300	1760	5.5	0.9	1350
DSH-2	2600	1942	5.5	1.2	1500
DSH-3	2800	2170	7.5	1.8	2300
DSH-4	3200	2412	11	2.4	2520
DSH-6	3700	2703	15	3.6	3000
DSH-8	4100	2950	18.5	4.8	1500
DSH-10	4500	3188	22	6	5500
DSH-12	4700	3367	30	7.2	5900
DSH-15	5100	3605	30	9	6600
DSH-20	5500	3934	37	12	9800
DSH-25	6100	4215	30	15	10200
DSH-30	6400	4460	37	18	11500

1. 设备的装载量因物料特性和使用工艺不同而有所变化;
2. 物料比重大、有粘性、长时间沉积不可负载启动。

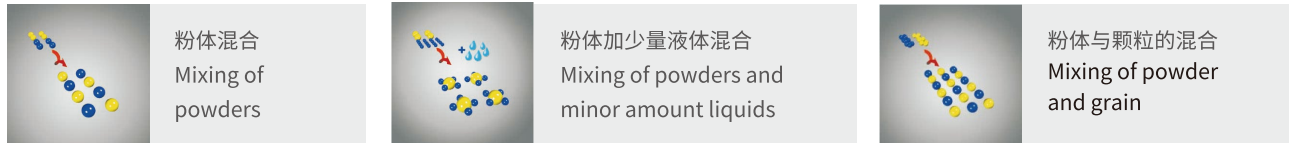

美好未来

BRIGHT FUTURE

发展历程 | BRIGHT FUTURE >>

